




## SKY-IP7361 Network IP Security Camera



- 2-megapixel CMOS Sensor
- 3 ~ 9 mm Vari-focal, Auto-iris Lens
- Removable IR-cut Filter for Day & Night Function
- Built-in IR Illuminators, effective up to 25 Meters
- Real-time MPEG-4 and MJPEG Compression
- Multiple Streams Simultaneously
- ePTZ for Data Efficiency
- Weather-proof IP67 rated Housing
- Built-in 802.3af Compliant PoE
- Two-way Audio via SIP Protocol
- Built-in SD/SDHC Card Slot for On-board Storage
- Mounting Bracket with Cable Management

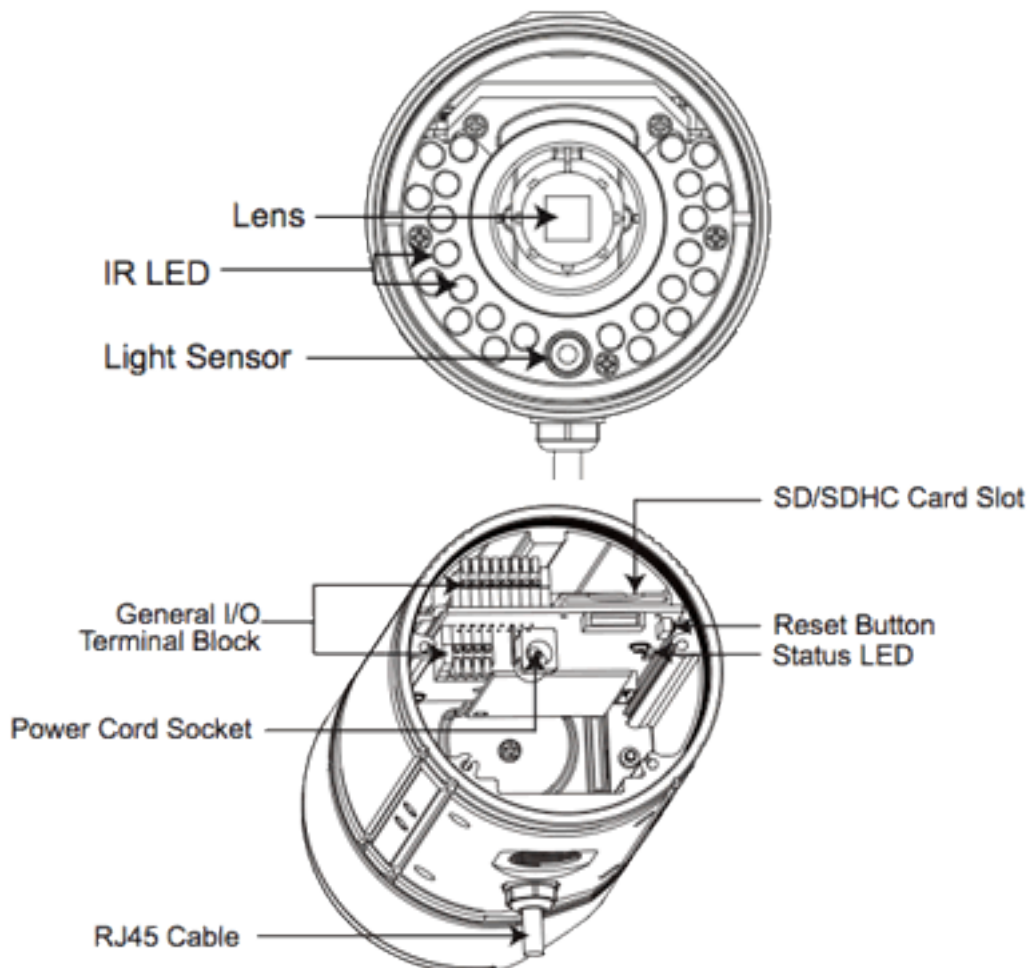

System	<p>CPU: Mozart 120 SoC  Flash: 16MB  RAM: 128MB + 128MBMB  Embedded OS: Linux 2.6</p>
Lens	<p>f = 3 ~ 9 mm  F 1.2 (wide)  F 2.1 (tele)  auto iris  Board lens  vari-focal  Removable IR-cut filter for day &amp; night function</p>
Angle of View	<p>31.7° ~ 93.0° (horizontal)  23.8° ~ 68.4° (vertical)</p>
Shutter Time	1/5 ~ 1/40,000 sec
Image Sensor	1/3.2" CMOS in 1600x1200 Resolution
IR Illuminators	Built-in IR illuminators, Effective up to 25
Video	<p>Compression: MJPEG &amp; MPEG-4  Streaming:  Simultaneous multiple streams  MPEG-4 streaming over UDP, TCP, HTTP or HTTPS  MPEG-4 multicast streaming  MJPEG streaming over HTTP or HTTPS  Supports activity adaptive streaming for dynamic frame rate control  Supports video cropping for bandwidth saving  Supports ePTZ for data efficiency  Supports 3GPP mobile surveillance  Frame Rates:  MPEG-4: Up to up to 30 fps at 800x600, Up to up to 10 fps at 1600x1200  MJPEG: Up to up to 30 fps at 800x600, Up to up to 10 fps at 1600x1200</p>
Image Settings	<p>Adjustable image size, quality, and bit rate  Time stamp and text caption overlay  Flip &amp; mirror  Configurable brightness, contrast, saturation, sharpness, white balance and exposure  AGC AWB AES  Automatic, manual or scheduled day/night mode  Supports privacy masks  BLC (Backlight compensation)</p>

Audio	<p>Compression</p> <p>GSM-AMR speech encoding, bit rate: 4.75 kbps to 12.2 kbps</p> <p>MPEG-4 AAC audio encoding, bit rate: 16 kbps to 128 kbps</p> <p>Interface:</p> <p>External microphone input</p> <p>Supports two-way audio via SIP protocol</p> <p>General I/O</p> <p>Supports audio mute</p>
Network	<p>10/100 Mbps Ethernet, RJ-45</p> <p>Protocols: IPv4, IPv6, TCP/IP, HTTP, HTTPS, UPnP, RTSP/RTP/RTCP, IGMP, SMTP, FTP, DHCP, NTP, DNS, DDNS, PPPoE, CoS, QoS, SNMP and 802.1X</p>
Alarm and Event Management	<p>Triple-window video motion detection</p> <p>One D/I and one D/O for external sensor and alarm</p> <p>Event notification using HTTP, SMTP, or FTP</p> <p>Local recording of MP4 files</p> <p>Tamper detection</p>
On-board Storage	<p>SD/SDHC card slot</p> <p>Stores snapshots and video clips</p>
Security	<p>Multi-level user access with password protection</p> <p>IP address filtering</p> <p>HTTPS encrypted data transmission</p> <p>802.1X port-based authentication for network protection</p>
Users	10 clients on-line monitoring at the same time
Dimensions	Ø: 83mm x 210 mm
Weight	Net: 1600 g
Power	<p>12V DC</p> <p>24V AC</p> <p>Power consumption: Max. 7 W</p> <p>802.3af compliant Power-over-Ethernet</p>
Housing	Weather-proof IP67-rated housing
Approvals	CE C-Tick FCC LVD VCCI
Operating Environments	<p>Temperature: -20 ~ 50 °C (-4 ~ 122 °F)</p> <p>Humidity: 90%</p>
Viewing System Requirements	<p>OS: Microsoft Windows 2000/XP/Vista</p> <p>Browser: Mozilla Firefox, Internet Explorer 6.x or above</p> <p>Cell phone: 3GPP player</p> <p>Real Player: 10.5 or above</p> <p>Quick Time: 6.5 or above</p>
Installation, Management, and Maintenance	<p>Installation Wizard 2</p> <p>32-CH central management software</p> <p>Supports firmware upgrade</p>
Applications	SDK available for application development and system integration