

Single channel or four channel stand alone video loss detectors with relay outputs

Our video loss detectors will monitor a camera signal and upon video loss triggers a relay to trip a device of your choosing. Numerous possibilities including alarms, sirens, shutting off gas pumps, etc.. Our Video loss detectors are available in single or 4 channel models.

Expandable

Use multiple single channels units at a site and add them as the system grows. If there are multiple cameras at a site, use the four input model and add additional models, single or multiple to grow the system!

Single channel unit



Four channel unit

Features/Specs

- Four channel unit (VLOSS-4) can utilize one power supply!
- Monitor 1 v p. to p. signals
- Normally open or normally closed with options for switched power or ground
- When video loss occurs, relay can trip various outputs
- Adjustable pot. for setting how long video loss must occur before triggering the relay
- 1 year warranty
- Dry contacts FORM C relay(s)
- 8 – 20 V DC operation
- Output voltage equals your input voltage (when jumpered to do so)
- Stand-alone units – use with any VCR, DVR solution!


Stand-Alone Solution

Use with any VCR or DVR solution. No compatibility issues! Install in older installations or new installs. Setup in seconds. Dry contact outputs for normally open or closed loops, with jumper option for powered output (equal to your input power supply in the 8-20 VDC range).


Toll Free: 877-476-6607 Fax: 877-369-4956

www.skywaysecurity.com
info@skywaysecurity.com

Single channel or four channel stand alone video loss detectors with relay outputs

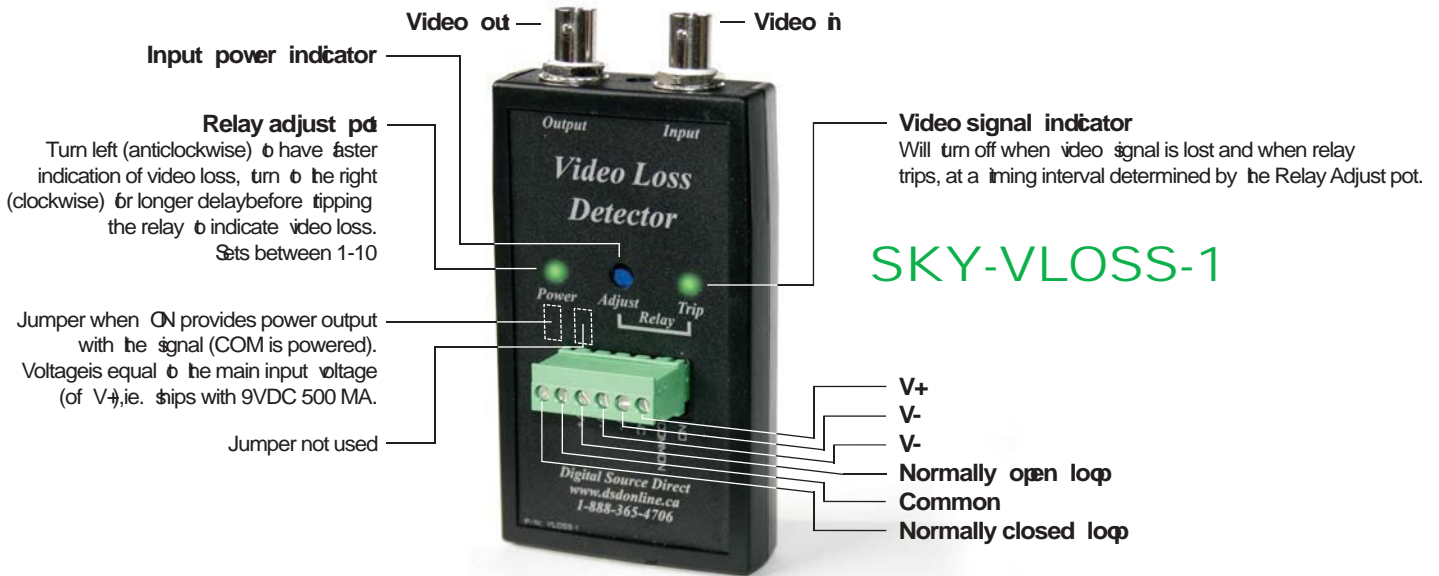

SKY-VLOSS-4

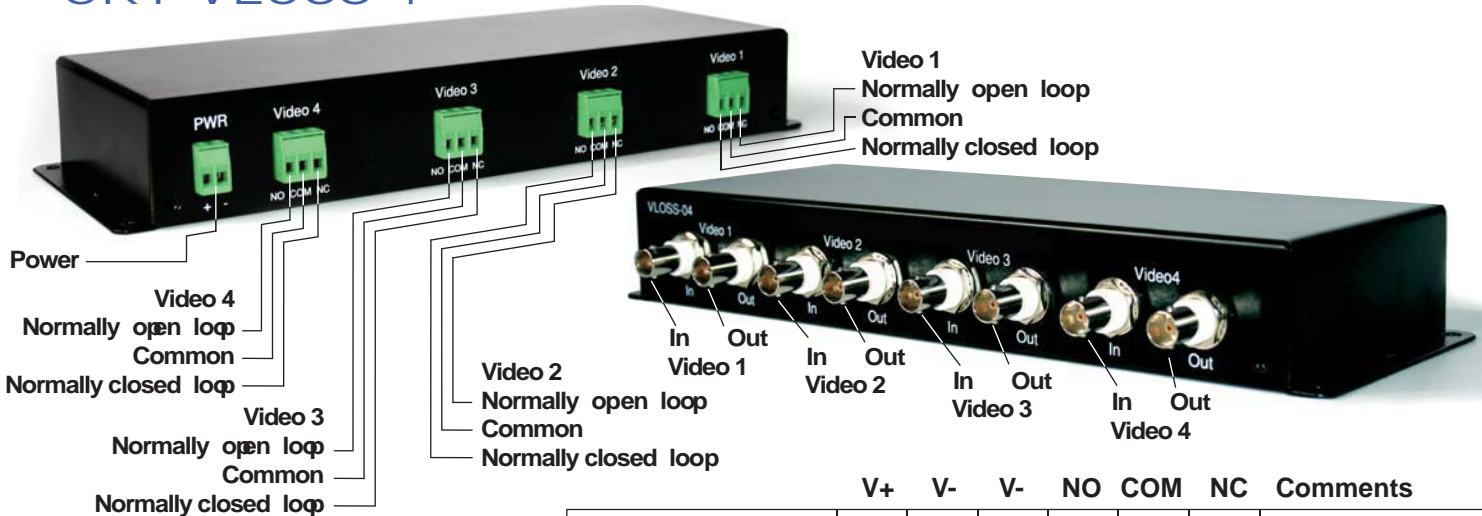

VLOSS-1 ●
VLOSS-4 ●

	V+	V-	V-	NO	COM	NC	Comments
Jumper ON		●	●			● ●	0 volts out when video is good, input voltage OUT when video is lost.
		●	●	● ●			Input voltage OUT when video is good, 0 volts out when video is lost.
Jumper OFF				● ●	● ●		Dry contact OPENS when video is lost.
					● ●	● ●	Dry contact CLOSSES when video is lost.